

Features


- Reduces chloramine, PFOA/PFOS, pharmaceuticals, VOC, asbestos and more.
- Filter head automatically turns off water supply when cartridge is removed.
- Replacing RO carbon block VOC filter every six months keeps filtration system performing effectively.
- Postage-paid recycling program for used cartridges to reduce solid waste to landfills.
- For cold water use only.

Material

- High-impact plastic construction.

Installation

- Under-sink.
- Quarter-turn twist cartridge for easy installation and replacement.




Codes/Standards

CSA B483.1
NSF/ANSI 42
NSF/ANSI 53
NSF/ANSI 401


KOHLER® Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

Ø 2-1/4"
(57 mm)

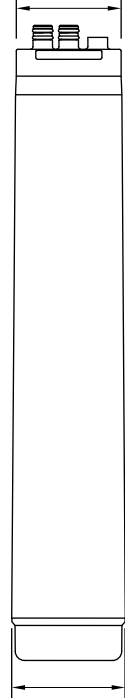

Ø 2-7/16"
(62 mm)

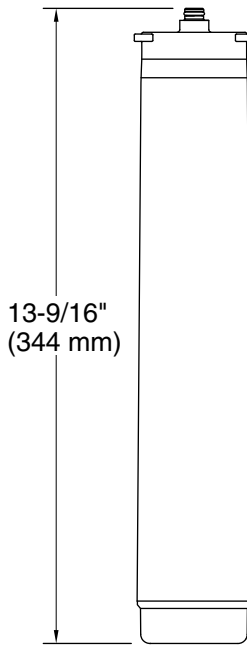

13-9/16"
(344 mm)

Technical Information

All product dimensions are nominal.

Notes

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:
Water Pressure: 40-100 psi (276-689 kPa) Water
Temperature: 40-100°F (4.4-37.8°C)