

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- Designed to be installed through 1, 4-3/4" diameter hole
- Single function handheld shower
- 59" double interlock spiral hose (metal)
- Includes integral dual check valves for backflow protection


## OPERATION

- Pivot action lever style handle
- Pull diverter to switch between faucet and handshower

## FLOW

- Faucet designed to deliver 6 gpm (22.7 L/min) at 45psi
- Handshowers designed to deliver 1.75 gpm (6.6 L/min) at 80psi


## STANDARDS

- Third party certified to: WaterSense®, ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

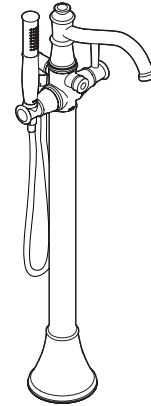

## BELFIELD™


### Single Handle Single Riser Floor Mounted Tub Filler Faucet

**Model:** 9025 series

**Floor Mount Rough-In Kit:**

TS50100 (Joist)

TS50110 (Concrete)

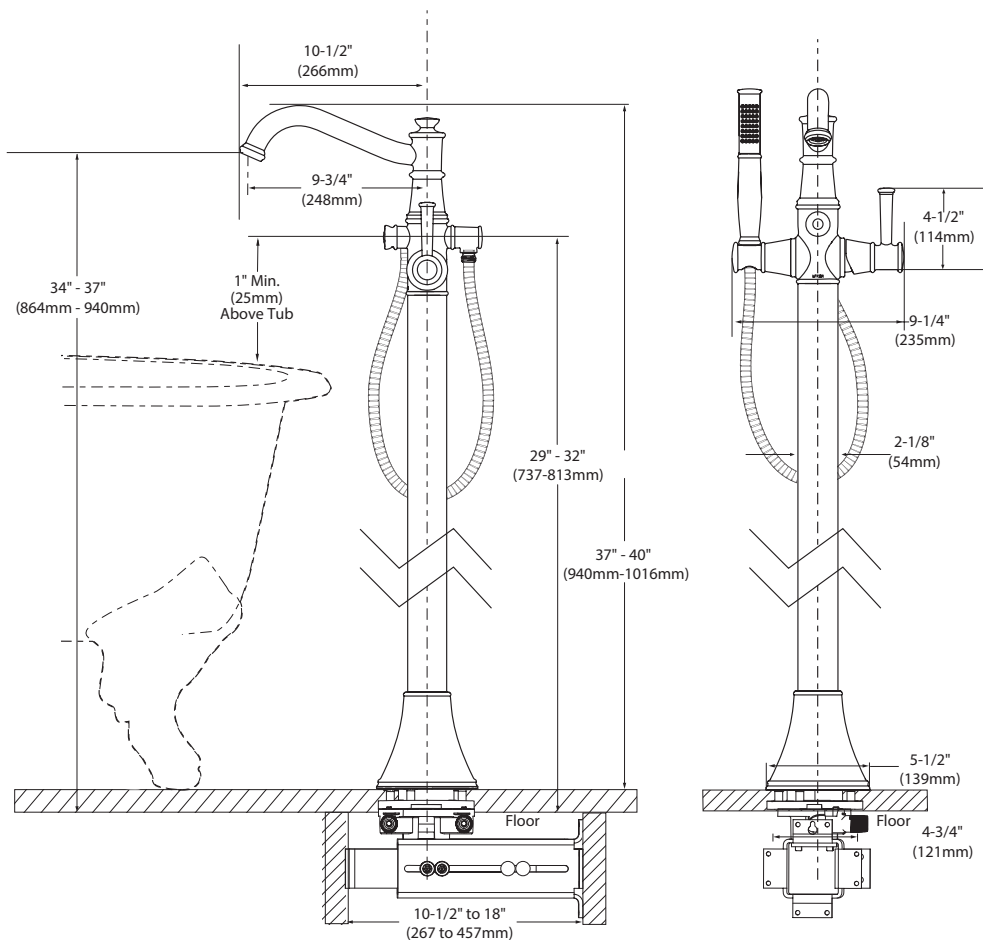

## CRITICAL DIMENSIONS

(DO NOT SCALE)